

11 Series Emergency Break Glass


The Emergency Exit Break Glass is intended for quick evacuation during fire outbreak or any other emergency situations where the access control system needs to be disabled immediately. It can be used for open or closed circuits. The emergency break glass switch cuts the circuit instantly and disables the door locking mechanism when the glass is pressed hard or broken. The soft glass is specially designed to be broken easily when pressure is applied using fingers.



EFS1107

Product Specifications

- Dimension : 86L x 86W x 52H (mm)
- Max Current Rating : 2A @ 30 VDC
- Output Contacts : Double Pole Double Throw
2NO/2NC/2COM
- Field Selectable : Fail Safe / Fail Secure
- Operating Temp : -20 ~ +55 Degree Celsius
- Operating Humidity : 0 ~ 95% (Relative Humidity)
- Housing Material : ABS Plastic
- Weight : 0.165 Kg
- Operation : Resettable By Replacing Glass

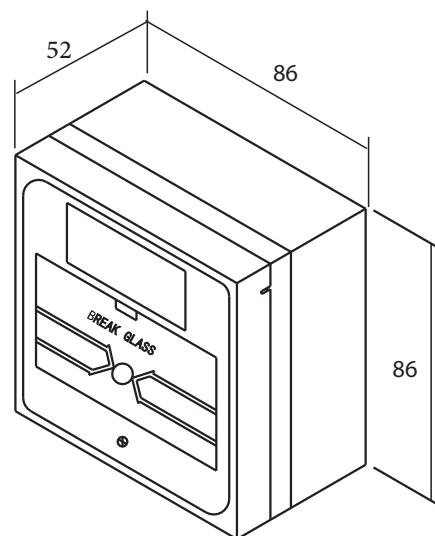

★ ★ ★
3
YEARS
WARRANTY

Cycle Tested
500,000



IPIXA SECURITY LIMITED
Kemp House, 160 City Road,
London, EC1V 2NX,
United Kingdom
ipixa.co.uk